

Time Clock Experts.com



100% Secure Shopping Guarantee

**TIMETRIX**™ Elite • Bio ek  
*Biometric Time Clock System*

TTEliteEK




Quick Start Guide  
SIMPLE • SMART®





# Contents




TTEliteEK  
Terminal




TIMETRAX™  
Software CD



TTEliteEK Quick Start  
Guide &  
TTElite Series Software  
Reference Guide




Mounting  
Hardware




Ethernet  
Cable  
(CAT5)

Power  
Supply



Security Bracket  
& Key

## What you will need.




Tape Measure



Pencil



Phillips Head  
Screw Driver




Power Drill  
(Optional)






## Connect & Mount Terminal

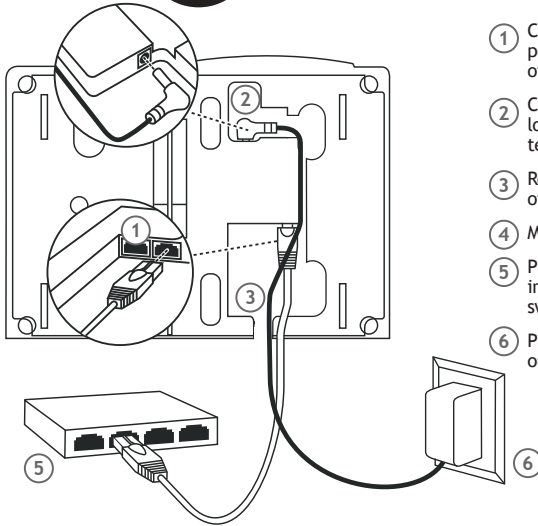

- 1 Connect Ethernet cable into Ethernet port located in compartment on back of terminal.
- 2 Connect power supply into power port located in compartment on back of terminal.
- 3 Route the cables through channel at base of terminal.
- 4 Mount terminal (see instructions below).
- 5 Plug free end of enabled Ethernet cable into a DHCP network jack, router or switch.
- 6 Plug free end of power supply into outlet.



### To mount terminal.

- Hold mounting bracket flush against wall with cable access cutout towards floor. Note: The bottom of bracket should be approximately 45 inches from floor. Allow for 6ft long cable.
- Level bracket & mark four screw holes close to corner tabs.
- Drill holes as marked and insert included anchors if needed.
- Screw mounting bracket to wall with included screws.
- Drill hole centered in rectangular opening of bracket for cables. The hole should be large enough to route cables through wall.
- Push terminal onto mounting bracket aligning four tabs on bracket with four matching slots on back of terminal. **Be sure to write down the terminal serial number before mounting.**

- Slide terminal downward until locking tab clicks into place. When properly mounted, terminal cannot be slid up and off bracket without using included wall bracket release key to disengage locking tab.


### To detach terminal.

- Hold wall bracket release key with pointed end up & diagonally cut side away from you.
- Insert key into narrow slot located on bottom of terminal to right of cable access cutout.
- Push key all the way up into slot. Key will slide easily until last ½ inch until some resistance from locking tab is felt.
- With key fully pushed into slot, slide the terminal up and off mounting bracket.



## Install TimeTrax™ Software

1



Insert TimeTrax™ DVD into CD-ROM drive. Run Install Wizard and click “Finish” when installation is complete. *Installation may take 15 minutes or longer to complete depending upon other installed applications.*



Password may be changed after Setup is complete by clicking Administration/User Accounts from tool bar.

2

Enter Login ID “ADMIN”.  
Enter Password “PTI” (case sensitive).  
Click “LOGIN”.



## Setup

1

**IMPORTANT:** Click “Help” from the main toolbar to access index of help topics, or click “F1” for help on a specific screen. Click on “Company” from the “Setup” drop down menu. Complete required fields (\*) then click “Save & Close”.



Required fields (\*) must be completed during initial Setup. Optional fields can be completed at any time.



## Setup Cont.

2

The screenshot shows the 'Setup' screen for configuring a Pay Class. The 'Setup' dropdown menu is open, showing options: Company, Department, Pay Class, Pay Type, Shift/Meal, Schedule, Rounding, Overtime, Employee Group, and Employee Profile. The 'Pay Class' option is selected. The main form area is titled 'Edit Pay Class: WRELY'. It has tabs for 'General' and 'Pay Periods'. Under 'General', there is a field for 'Pay Class ID' with the value 'WRELY' and a field for 'Pay Class ID Description' with the value 'Weekly Pay Class'. There are also 'Save' and 'More & Close' buttons.

Click “Pay Class” from the “Setup” drop down menu. A default Pay Class has been set up. Click “Edit” to review all settings. Click “Save & Close”. If additional Pay Classes are needed, click “Add Pay Class” and complete required fields (\*). Click “Save & Close”.

3

The screenshot shows the 'Setup' screen for configuring an Employee Group. The 'Setup' dropdown menu is open, showing options: Company, Department, Pay Class, Pay Type, Shift/Meal, Schedule, Rounding, Overtime, Employee Group, and Employee Profile. The 'Employee Group' option is selected. The main form area is titled 'Group: Weekly Employee Group'. It has tabs for 'General' and 'Pay Periods'. Under 'General', there is a field for 'Employee Group ID' and a field for 'Employee Group ID Description'. There is also a 'Pay Class' dropdown menu with 'WRELY' selected. There are 'Save' and 'Select' buttons.

Click “Employee Group” from the “Setup” drop down menu. Click “Add Employee Group” and complete required fields (\*). Click “Save & Close”. Repeat if additional Employee Groups are needed.



Start time should be one hour after last Out punch of previous pay period and one hour before first In punch of current pay period.



## Setup Cont.

4

Click “Employee Profile” from the “Setup” drop down menu. Click “Add Employee” and complete required fields (\*). Click “Add Card” to enter a unique # up to 8 digits in the “Card #1” field. Click “Save” then click “Save & Close”. Repeat to add employees.



## Using Time Clock

**IMPORTANT:** Before using time clock, please register employee fingerprints at the time clock terminal. Instructions may be accessed by clicking “HELP” from main toolbar, or click “F1” for help on a specific screen. Please reference “FingerScan Registration (TTELITEEK)” section.

Place finger on red lit finger pad.

If employee finger scan is successfully read, the red light will briefly go out, the time clock terminal will beep and the employee number will be displayed on terminal screen.

Employee punches generated from finger scans are stored within the terminal. The terminal stores the last 6,000 punches before download is required. Depending upon usage, punches can be retrieved on a more or less frequent basis.

