

# TIMETRAX™ Sync

SIMPLE : SMART™



## Quick Start Guide

PYRAMID

**TABLE OF CONTENTS**

PRODUCT OVERVIEW . . . . . 2

SOFTWARE REQUIREMENTS . . . . . 2

RF TRANSMITTER . . . . . 3

RF INSTALLATION . . . . . 4

RF TRANSMITTER PORTS. . . . . 5

BELL TONE SYSTEMS . . . . . 5

SOFTWARE SET UP . . . . . 6

BELL SCHEDULE . . . . . 7

GPS SPECIFICATIONS . . . . . 8

RF TRANSMITTER SPECIFICATIONS . . . . . 8

POE SPECIFICATIONS . . . . . 9

RF TRANSMITTER SAFETY . . . . . 10

RF ANALOG CLOCKS . . . . . 11

RF DIGITAL CLOCKS . . . . . 11

POE INSTALLATION . . . . . 12

ACCESSORIES . . . . . 13

WARRANTY & TECHNICAL SUPPORT . . . . . 14

**Don't Forget: Register your product online:**  
[www.pyramidthimesystems.com/support/product-registration](http://www.pyramidthimesystems.com/support/product-registration)

**Copyright Information**

© 2024 Pyramid, LLC. All rights reserved.

Reproduction, adaptation or translation without prior written permission is prohibited, except as allowed under the copyright laws.

The information contained herein is subject to change without notice. The only warranties for Pyramid are set forth in the express warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. Pyramid shall not be liable for technical or editorial errors or omissions contained herein.

## PRODUCT OVERVIEW

TimeTrax Sync™ Clock System is an engineered modular time system able to synchronize wired, wireless or Power over Ethernet (POE) devices using TimeTrax Sync™ software.

### Wireless Synchronized Clock System

The Pyramid Wireless RF Transmitter uses 902-928MHz frequency-hopping technology to wirelessly transmit synchronization signals from designated time source to the following devices:



The Pyramid Wireless RF Transmitter controls BCD signals via auxiliary ports:



The wireless transmitters are able to pull time from the following sources:




A list of Internet NTP Primary Servers is available with TimeTrax Sync™ software and updated periodically by Pyramid Time Systems.

## SYSTEM REQUIREMENTS

Part#	SASDLCWDXX - TimeTrax Sync™ Software
Operating	Windows 10 and higher
PC	x64 Pentium IV 2.0 GHz or greater
Memory	Minimum 8GB of RAM, recommended 16GB or greater
Free Space	20GB or greater
Internet Browser	Chrome or Firefox
CD-ROM	4x or faster



RF TRANSMITTERS	
Part#	DESCRIPTION
9T1W1	Shelf Transmitter with Software
S9DWXSLAUB	Wall Transmitter with Software
S9DSXOLAUB	Shelf Secondary Transmitter Without Software
42337	Wall Secondary Transmitter Without Software

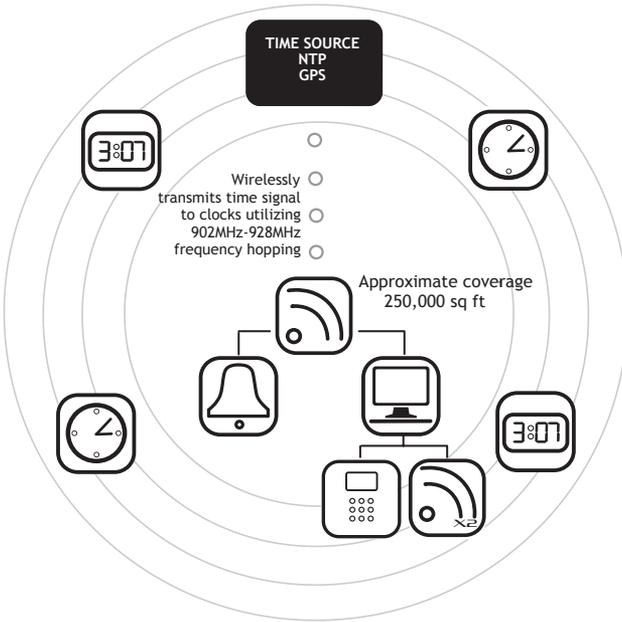

- TT Sync Wireless RF Transmitter captures main time source via GPS, NTP or PC TIME.
- Transmitter utilizes frequency-hopping technology to broadcast precise time between 902MHz-928MHz (128 signaling channels) every 20 seconds, to an unlimited number of clocks.
- TT Sync software synchronizes PoE clocks & enables Pyramid transmitters to be designated time source for TimeTrax™ Sync Clock & Tone Systems.
- Wireless RF Secondary Transmitter(s) may be added for additional coverage where content or construction obstruct the existing RF transmitter signal.
- One software controls all transmitters.

 WIRELESS RF TRANSMITTER INSTALLATION

- ① Choose appropriate location to install the Wireless RF Transmitter.


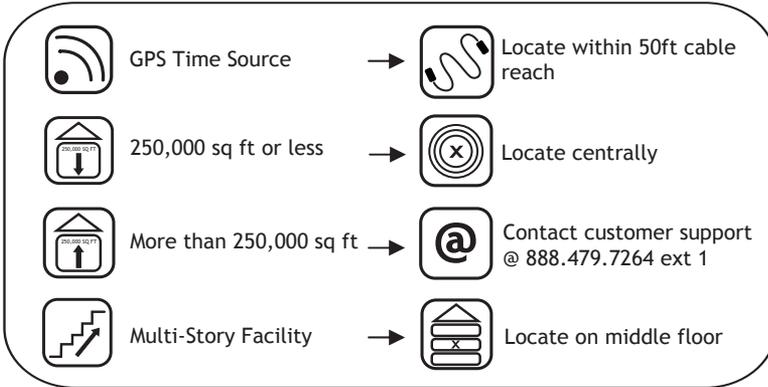


Locate indoors in dry location




Do not locate where people regularly come within 24in (60cm)

- ② **Attach** supplied antenna to top of 9T1WI Wireless RF Transmitter by rotating in clockwise direction.<sup>1</sup>
- ③ **Place or mount transmitter** so antenna is positioned vertically. This is required for optimum performance. Drill holes using template as a guide.
- ④ **Connect Ethernet Port** to computer or network. The transmitter will be configurable from anywhere on local network.
- ⑤ If **GPS Receiver** is to be used as time source, install and connect to GPS port of transmitter.
- ⑥ **Connect power supply** (supplied) to transmitter and to any standard wall outlet.
- ⑦ **TTSync software** controls more than one **Wireless RF Secondary Transmitter**. TTSync software will discover the device & assign global setting.
- ⑧ All wires must be a minimum of 1 ft. away from the antenna.

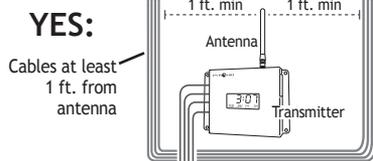


<sup>1</sup> Using anything other than included Power Supply or included Antenna in a horizontal orientation may be unsafe, cause improper operation, and violates FCC regulations.

## Pyramid Wireless RF Transmitter Ports

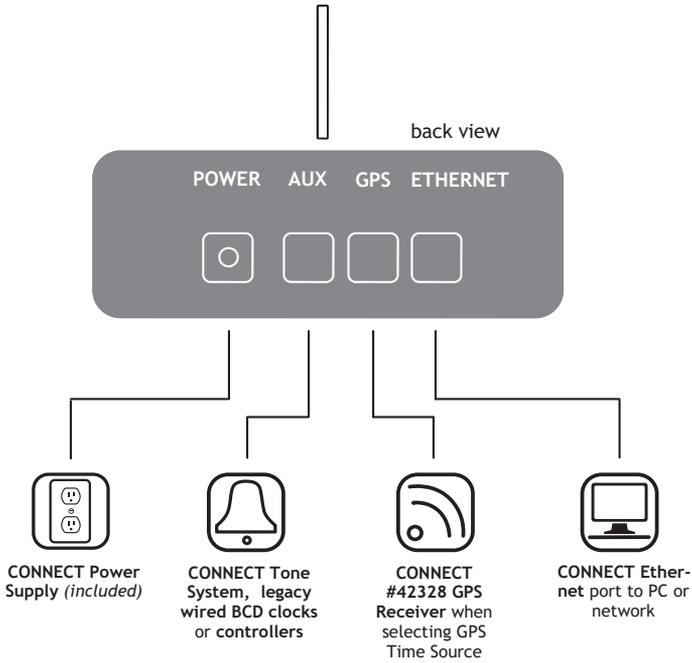

## Horn/Bell/Tone System

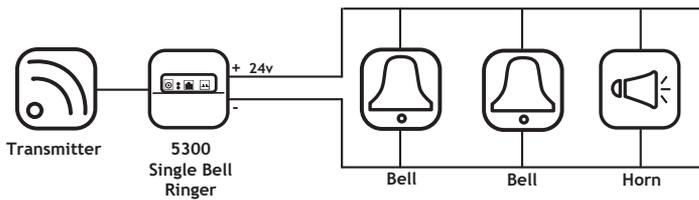

Each Transmitter controls a different bell/tone system

## SET UP SOFTWARE

- ① Contact Pyramid Time Systems for software access via download at:  
Phone: 888.479.7264  
Email: WirelessSales@ptitime.com
- ② Install TimeTrax Sync™ Software into a networked computer or one that is able to be directly connected to transmitter via ethernet cable.
- ③ Installation should automatically run once the software is downloaded and you open the file. The software will self-guide you through initial stages of installation.
- ④ After software is successfully installed, run program by double clicking Pyramid icon on your desktop. The Pyramid TimeTrax™ Sync Login Screen will appear. You are now ready to sign in.
- ⑤ “User Account Control,” press “YES”.
- ⑥ Enter the following User Name and Password (password is case sensitive):  
User Name: **ADMIN**                      Password: **PTI**
- ⑦ Click the **LOGIN** button. TimeTrax Sync™ security is independent of Windows Security, therefore user accounts need to be created for all users.

For security purposes, users of TimeTrax Sync™ are required to Login to use software every time. In addition, it is advisable to change the password for the ADMIN user account to prevent unauthorized use of the software to manipulate transmitter configuration settings.  
You can do this under the **Administration/User Accounts**.

- ⑧ The software will automatically discover & list any Pyramid Ethernet device on network.
- ⑨ Before you program your settings, make sure your clock or transmitter is marked as **Active** and you have a green check mark under OK.

**\*NOTE:** The firewall ports required are TCP Ports 3330, 3331, and 3333. The direction of the firewall access is both inbound and outbound which is needed for communication between a PoE clock to/from the software or an RF transmitter to/from the software.

## GLOBAL SETTINGS

The default settings are set to Eastern Standard Time, AM/PM display and USA date format and 4 digit year.

To change these settings follow these steps:

- 1 Click on **Edit Global Setting** Tab.
- 2 Click the drop down arrow in the **Time Zone** window and choose your time zone.
- 3 Select your **Daylight Savings Setting**.
- 4 Choose your **Time Format**.
- 5 Click **Save & Close**

## CUSTOM SETTINGS FOR INDIVIDUAL DEVICE

To change settings for individual devices, follow these steps:

- 1 Click on **EDIT** on the device discovery list.
- 2 Click on **Custom Setting** Button
- 3 Change the **Device** name if you choose.
- 4 Click on **NTP/NTP Servers**, **PC Time**, or **GPS** (only if the GPS hardware is installed for your transmitter)
- 5 Select your **Time Zone** and your **Daylight Savings Time** settings
- 6 Choose your **Time Format**
- 7 Click **Save & Close**

\*The SED2R14LRD (Time and Date PoE clock) will default to USA date format with a 4 digit year. If you would like to change to Euro Date format or Julian Date, click on Advanced in the upper right corner.

## SETTING UP YOUR BELL SCHEDULE

- 1 Click on **Event Schedules**
- 2 Click on **Add Schedule**
- 3 Name your Schedule under **Event Schedule ID**.
- 4 Click **Add Event**
- 5 Choose your **Event Time**, **Event Duration** and Select the **Days** for the Bells to ring
- 6 Click **Save & Close**
- 7 Continue to add as many events as needed. Once your schedule is completed, click **Close**
- 8 Click **UPLOAD**. Choose the schedule you want to upload and then put a check mark in front of the device you want to upload it to
- 9 Click **UPLOAD & CLOSE**

**ETHERNET AUX GPS: SPECIFICATIONS**

**ETHERNET PORT (STANDARD RJ45 FEMALE CONNECTOR):**

Auto Speed 10/100TX	Any 10 or 100Mbps, Switch or PC
Auto MDI/MDIX	No Crossover cable is needed

**ETHERNET: (NOTE THAT ANY IP SETTINGS BELOW CAN BE SET OR OVERRIDDEN BY TIMETRAX SYNC™ SOFTWARE)**

Auto Discovery	No IP address or DHCP server is required to discover transmitter, direct connect
DHCP	IP Address, Subnet Mask, Gateway
NTP Source	List from TTSync Software; pull time from Internet or Intranet
NTP Server	RFC2030 compliant Time Server; serve time to Internet or intranet

**OPTIONAL AUXILIARY PORT (RJ45 COMPATIBLE FEMALE CONNECTOR) :**

BCD out/AUX	Sends BCD signals to TimeTrax™ analog & digital clocks (wired)
	Sends BCD signals to Pyramid Tone Systems 5300 bell relay

**OPTIONAL GPS PORT (RJ45 COMPATIBLE FEMALE CONNECTOR) :**

IEC RS232 Compatible	4800 Baud I/O to receive NMEA time and 1 second edge sync signals
GPS Signal Receiver	Part #42328

**TT SYNC WIRELESS RF TRANSMITTER : SPECIFICATIONS**

RF Power Output	1 watt (30dBm)	
Frequency Range	902-928MHz Frequency Hopping Technology	
Channel Spacing	~200KHz	
Modulation	Raised Cosine 2FSK Modulation; 10KHz Maximum Deviation	
Data	Encrypted 2400 BPS	
Frequency Stability	2ppm	
Clock Time Update	Every 20 seconds	
NTP Time Update	6 Hr Default (can be set)	
GPS Time Update	Once per second	
Coverage	Approximately 250,000 sq ft	
SHELF	Size (WxHxD)	6.5in x 2.5in x 6.5in (16.5cm x 6.5cm x 16.5cm)
	Weight	4lbs (1.81kg)
WALL	Size (WxHxD)	5.5in x 5in x 1.75in (13.9cm x 12.7cm x 4.4cm)
	Weight	3.3lbs (1.49kg)
Antenna Length	5in (12.7cm)	
Required Voltage	Universal 100-240VAC 50/60Hz	

**POE CLOCK SPECIFICATIONS**

Time Base	NTP	
Time Update Frequency	Configurable (1/minute, 1/week)	
Method	NTP Time Server	
	<b>Ethernet RJ45</b>	<b>Cord</b>
Power Input	48VDC	105-120VAC
Average Power Consumption	4.848 Watts	5.6 Watts
Operating Temp	-30F (-34.44C) to 130F (54.44C)	
Warranty	3-year manufacturer's limited warranty	
Guarantee	30-day money back guarantee	
Includes	Clock, security mounting bracket, screws and anchors, mounting template, security key and install instructions.	

**DISPLAY:**

Display Format	12 or 24 hour mode SED2R14LDR-Time and Date. Date format in US or Euro with Julien Date or 4 digit year option.
Digits	7 segment LED digits
Visibility	100ft. (30.5m) 2.5in digit height 200ft (60.96m) 3in digit height 250ft (76.05m) 4in digit height SED2R14LDR -Time 60ft, Date 35ft
LED Color	Red, White, Blue

**CASE-DIGITAL:**

Case	Smooth surface 94VO/5VA ABS
Bezel Color	Black or Silver SED2R14LDR(time & date) black only
Lens	Shatterproof, side molded, polished polycarbonate crystal
Mounting	Wall, Dual Wall, Dual Ceiling

**CASE-ANALOG:**

Dial Material	Polystyrene	
Lens Material	Non glare, shatterproof transparent polycarbonate	
Bezel Material	Reinforced Acrylonitrile Butadiene Styrene (ABS)	Hardwood
Bezel Color/Finish	Black or Silver	Cherry, Oak or Walnut
Dial Format	12 Hour, 12 Hour with seconds, 12/24 hour or custom.	12 Hour or Roman Numeral

**DIMENSIONS/WEIGHTS - DIGITAL:**

	WxHxD (in)	WxHxD (cm)	Wt. (lb)	Wt. (kg)
2.5in/6-digit (red LED)	11.25x4.5x1.5	28.28x11.5x3.75	1.5	0.68
3in/4-digit (red LED)	11.25x4.5x 1.5	28.28x11.5x3.75	1.5	0.68
4in/4-digit (red, white LED)	11.5x6.25x1.5	29x15.7x3.75	1.9	0.86
4in/6-digit (red or white LED)	15.5x6.25x1.5	39x15.75x3.75	2.3	1.04
SED4R6TALB (4 in/6 digit count up/down clock) CTPLATEKIT required. Red LED	15.5x6.25x1.5	39x15.75x3.75	2.85	1.29
SED2R14LDR (time and date clock 6 digit clock) Red LED	11.5x6.25x1.5	29x15.24x3.75	2.35	1.06

**DIMENSIONS/WEIGHTS - ANALOG:**

	Dia.x D (in)	Dia.x D (cm)	Wt. (lb)	Wt. (kg)
13" Analog	13.25 x 2.5	33.6 x 6.35	3.0	1.36
17" Analog	17 x 2	43.1 x 5.08	4.3	1.95
Hardwood Analog	16.5 x 2.25	41.9 x 5.7	7.5	3.40

**ENVIRONMENTAL : INDOOR USE ONLY**

Storage Temp -30°C to 80°C, 22°F to 176°F

Operating Temp 0°C to 70°, 32°F to 158°F



Condensing 95% RH non-condensing

**TRANSMITTER SAFETY**

- Do not place transmitter in close proximity of life support systems or critical safety systems.
- To limit RF exposure, this transmitter must be installed to provide a separation distance of at least 24in (60cm) from all persons.
- Do not touch the antenna connector on top of enclosure when transmitter is in operation.
- Use only provided power supply and antenna.
- Install transmitter indoors in dry area.

**TRANSMITTER EQUIPMENT PRECAUTIONS**

- Antenna should be connected and oriented vertically before power is applied.
- Using anything other than provided antenna is prohibited by FCC regulations.
- There are no serviceable or adjustable parts inside the case of transmitter.
- Opening transmitter case voids all warranties.
- Any modifications to transmitter, antenna, or stated operating conditions violates FCC regulations and may be detrimental to health or safety.
- All wires must be a minimum of 1 ft. from the antenna.

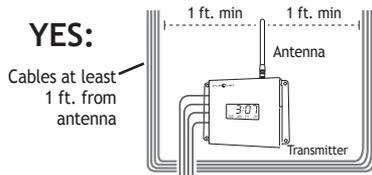

 RF ANALOG CLOCKS

- 1 Complete Transmitter installation and/or software set-up prior to clock installation
-  Locate indoors in dry location unless using weather cover (see p.11)
- 2 Choose appropriate location to install clock(s).
- 3 Wired clock(s) should be hard wired to standard electrical box by a qualified electrician.
- 4 Mount clock(s) using any of the following options:
  - (1) Direct Wall Mount: Mount to surface using template (included) & #8 screws. Insert screws into keyhole slots in back of clock.
  - (2) Security Mount: Using security bracket & template (included), screw bracket directly to surface with (2) #8 screws. To hang clock, align holes on back of clock with security bracket hooks.
  - (3) Dual Clock Wall or Ceiling Mount: Use optional brackets.

CLOCK MOUNTING BRACKETS

42320	Dual Clock Wall Bracket Kit, 13in Analog, 4 x 6 Digital
42443	Dual Clock Ceiling Bracket Kit, Analog & Digital

- 5 Clock(s) will automatically synchronize upon completion of transmitter and/or software set-up. Clock(s) must be within approximately 250,000 sq. ft. range of transmitter. Transmitter is necessary to update RF Clocks.



 The battery operated clock(s) search for updated signal once per day at 2am and after battery installation.

 RF DIGITAL CLOCKS

- 1 Complete Transmitter installation and/or software set-up prior to clock installation
-  Locate indoors in dry location unless using weather cover (see p.11)
- 2 Choose appropriate location to install clock(s).
- 3 Wired clock(s) should be hard wired to standard electrical box by a qualified electrician.

 RF DIGITAL CLOCKS (cont.)

- ④ Mount clock(s) using any of the following options:
  - (1) Direct Wall Mount: Mount to surface using template (included) & (2) #8 screws. Insert screws into keyhole slots in back of clock.
  - (2) Security Mount: Using security bracket & template (included), screw bracket directly to surface with (2) #8 screws. To hang clock, align holes on back of clock with security bracket hooks.
  - (3) Dual Clock Wall or Ceiling Mount: Use optional brackets.

CLOCK MOUNTING BRACKETS

42247J	Security Mounting Bracket Kit, Digital and Analog
42320	Dual Clock Wall Bracket Kit, 13in Analog, 4x6 Digital
42321	Dual Clock Wall Bracket Kit, 2.5x6 & 3x4 Digital
42443	Dual Clock Ceiling Bracket Kit, Analog & Digital

- ⑤ Clock(s) will automatically synchronize upon completion of transmitter & software set-up. Clock(s) must be within approximately 250,000 sq ft range of transmitter. Transmitter is necessary to update RF Clocks.



- 
  - Ⓐ DIG clocks search for updated signal every 20 seconds. The battery operated DIG clock(s) search for updated signal once per day at 2am and after battery installation.
  - Ⓑ To set “Time Format” - Global or custom, click “Edit” then “Advanced” AM/PM (PM = Dot left top corner), Military (24HR)

POE CLOCK INSTALLATION

Please consult your PoE Installation Guide (Part# I2253 -Digital Clocks or Part #I2252 - Analog Clocks) which is included with your PoE Clock.

**ACCESSORIES**

<b>PART#</b>	<b>ITEM DESCRIPTION</b>
SASDLCWDXX	TimeTrax™ Synchronized Clock System Software
42337	Wall, Secondary Transmitter (without software)
S9DSX0LAUB	Shelf, Secondary Transmitter (without software)
42328	Receiver, GPS Signal
41269	BCD Extension Cable, 50ft
41314	BCD Extension Cable, 100ft
41313	BCD In-line Cable Coupler
43193-1	Wire Guard Kit, Chrome, 13in Analog Wire Guard Kit, Chrome, 17in Analog
43193-3	Wire Guard Kit for all Digital Clocks
42320	Dual Clock Wall Bracket Kit, 13in Analog, 4x6 Digital
42321	Dual Clock Wall Bracket Kit, 2.5x6, 3x4 & 4x4 Digital
42443	Dual Clock Ceiling Bracket Kit, 13in Analog & all Digital
42247J	Security Mounting Bracket 13in & all Digital
42689	Wash Down Enclosure - Digital
42690	Wash Down Enclosure - Analog 13"
42429E-1	Replacement Key, Security Mount (analog/digital)
41361	Bell, 6in 24 Volt DC
41392	Bell, 8in 24 Volt DC
41362	Horn, 24 Volt DC
5300	Bell Ringer, Single Zone, 24 Volt DC
41449	Bell Wire, 100ft Spool
41450	Bell Wire, 250ft Spool
42520C	Power Supply for all RF Transmitters
42362A	Antenna for all Transmitters
APOEPI	Ethernet Port Injector with 6ft Power Cord

## WARRANTY AND TECHNICAL SUPPORT

### 3-YEAR LIMITED WARRANTY

Pyramid warrants its Synchronized Clock Systems to the original user against defective material or workmanship for a period of 3 years from date of purchase.

- ① The manufacturer's responsibility under this Warranty is limited to repair or replacement of defective part or parts.
- ② Pyramid reserves the right to determine whether parts failed because of defective material, workmanship, or other causes.
- ③ Failure caused by accident, alteration, misuse or improper packaging of returned unit is not covered by this Warranty.
- ④ Any repair to equipment other than by Pyramid voids the Warranty.
- ⑤ The rights under this Warranty are limited to original user and may not be transferred to subsequent users.



**TECHNICAL SUPPORT CONTACT:**  
Should you need to speak live to one of our representatives, please call Toll-free (US/Canada): 888.479.7264 during regular business hours:  
**8:30am–5:00pm EST, Monday-Friday**  
Email: [WirelessSales@ptitime.com](mailto:WirelessSales@ptitime.com)


If Customer Service cannot troubleshoot your problem over the phone, we will replace your unit free of charge if it is within warranty period.

For details, please contact Customer Support at: **888.479.7264**

### ACTIVATE YOUR 3 YEAR WARRANTY:

<https://www.pyramidtimesystems.com/support/product-registration-synchronized-clocks>

## Pyramid™ TimeTrax Sync™ seamlessly synchronizes clocks and tone systems to promote productivity, reliability and efficiency in the workplace

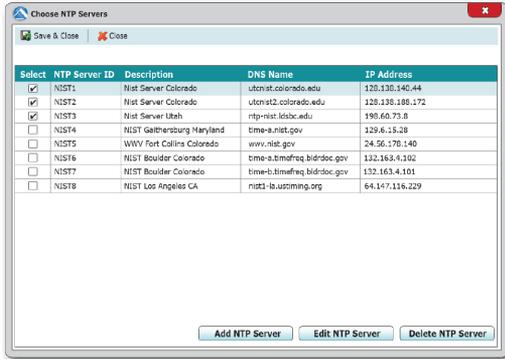


**Time Selection –**  
12 or 24 hour time format and multiple time zone selection capability.

**Automatic Adjustment –**  
Automatically adjusts for Daylight Savings Time & power outages.

**Scheduling –**  
Schedule bell/tone systems with the click of a mouse.



Scan with smart device to go to  
Pyramid Synchronized Clocks

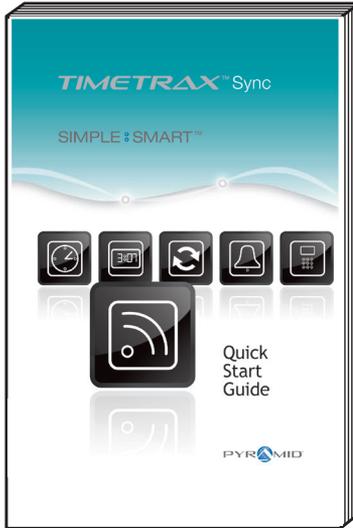

**Resources:**

For more information, visit [pyramidtimesystems.com](http://pyramidtimesystems.com) for digital guide copies, support resources, and accessories.

\*When printing off copies of user guides for templates, please open in Adobe Acrobat and follow the following print options:

Size: Actual (Measure template for accuracy before using when printing)

Booklet (If printing just the template page, make sure it is set to actual size and not shrink to fit)

Front & Back Print

TimeTrax™ Sync Clock System  
Quick Start Guide

---

SIMPLE ⋮ SMART®



**CONTACT US:**

For more information, visit [pyramidtimesystems.com](https://pyramidtimesystems.com)  
or call our technical support team at **888.479.7264**  
during regular business hours:

**8:30am-5pm EST, Monday-Friday.**

**Email: [WirelessSales@ptitime.com](mailto:WirelessSales@ptitime.com)**

Copyright © 2024 Pyramid Time Systems, LLC. All rights reserved.

I2227 Rev H

---