




## 5300 Single Zone 24 Volt Bell/Horn Ringer

Promotes accountability, productivity and punctuality with standardized class changes, shift changes, production schedules, arrival time, breaks, and departure time.

The **5300 Single Zone 24 Volt Bell/Horn System** signals 24V DC bells and horns (sold separately). Receives bell/horn activation signals from **TimeTrax™ Sync RF Wireless Transmitter**, **Pyramid 4000/5000 Series Auto Totaling Time Clocks**, or **TimeTrax™ Elite Series Automated Time Clock Systems**. Handles maximum load of 800mA.

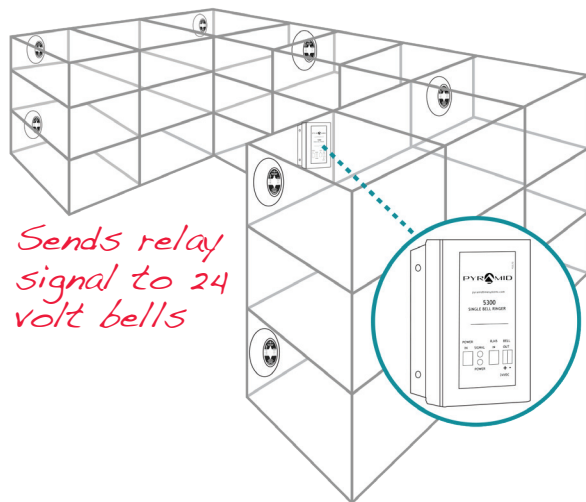

- Standardizes shift changes, arrival, break and dismissal times
- Receives bell/horn activation signals from Pyramid 4000/5000 Series Time Clocks, TimeTrax™ Elite Series Time Clocks, or TimeTrax™ Sync RF Wireless Transmitter
- Bell and horn schedules configured using compatible time clocks, master clock or transmitter
- Signals 24V DC bells and horns
- Provides power to bells and horns (800mA max total load and powers up to 8 Analog Clocks (5200) using RJ45)
- Single Zone Configuration
- Durable Steel casing

### TIMETRAX SYNC™ 5300 SINGLE ZONE 24 VOLT BELL/HORN RINGER

Part No.	Description
5300	Single Zone 24 Volt Bell/Horn Ringer



24V DC bells & horns sold separately





## 5300 Single Zone 24 Volt Bell/Horn Ringer




### SPECIFICATIONS

Zones	Single
Power Output	800mA 24V DC, and powers up to 8 Analog Clocks using RJ45
Compatible Signal Devices (sold separately)	4000, 4000HD, 4000Pro, 5000, 5000HD Auto Totaling Time Clocks, PSDLAUBKK, TTPROXEK, TTELTEEK Elite Time Clock Systems, 9T1WI, S9DWXSLAUB, S9DWXOLAUB, 42337 RF Wireless Transmitters
Dimensions (WxHxD)	4.25" X 5.25" X 1.25"
Weight	.85lbs
Power	120VAC, 60Hz In – 18VAC Out (UL/CUL listed power supply)
Mounting	Wall Mount
Color	Black
Includes	5300 Single Zone 24 Volt Bell Ringer, 50' RJ45 Cable, RJ45 Y Splitter, Power Transformer, Mounting Hardware, User Guide
Warranty	1-Year Manufacturer's limited warranty

### ACCESSORIES

41361	6" 24V DC Bell (Signal Device)
41392	8" 24V DC Bell (Signal Device)
41362	24V DC Horn (Signal Device)
41449	Bell Wire, 100'
41450	Bell Wire, 250'
41270	RJ45 Cable Splitter
41200	Power Adapter 120V
4000Pro*	Auto Totaling Time Clock
5000*	Auto Totaling Time Clock
5000HD*	Auto Totaling Time Clock
PSDLAUBKK*	TimeTrax™ Elite Swipe Card Time Clock System
TTPROXEK*	TimeTrax™ Elite Proximity Time Clock System
TTELTEEK*	TimeTrax™ Elite Biometric Time Clock System
9T1WI*	TimeTrax Sync™ RF Wireless Transmitter
S9DWXSLAUB*	TimeTrax Sync™ RF Wireless Transmitter
S9DSXOLAUB*	Add-on TimeTrax™ RF Wireless Transmitter
42337*	Add-on TimeTrax™ RF Wireless Transmitter
5200	13" Analog Clock (5300 can power up to 8 clocks)

\*Requires one of these products for operation.

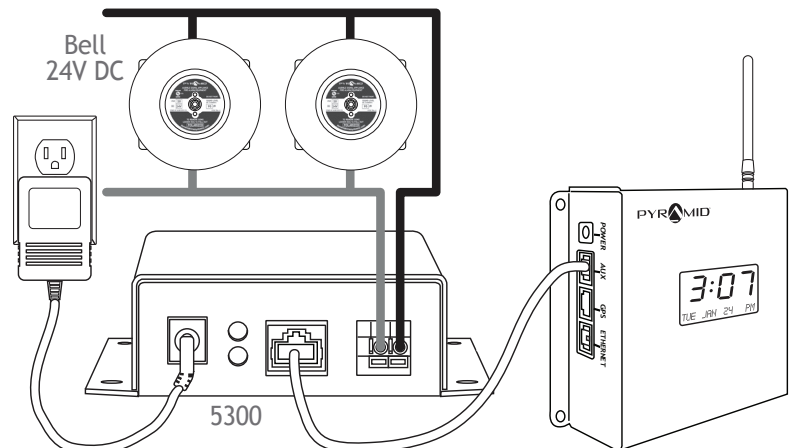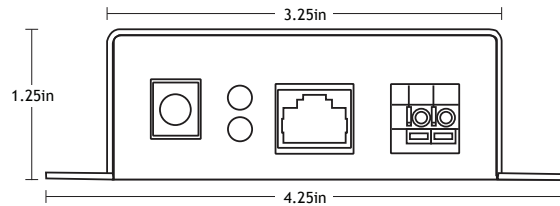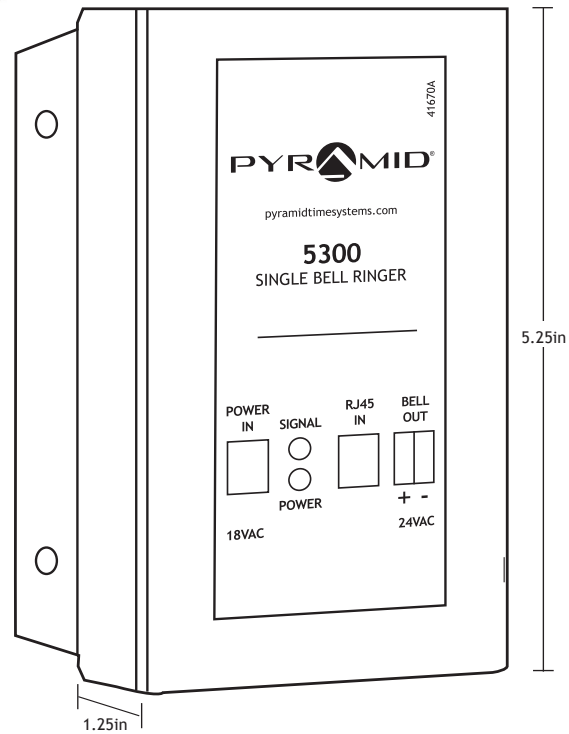

#### Simple Setup.

Simply plug the 5300 Bell Ringer into a standard electrical outlet and connect to signal device (see accessory list). Connect 24V DC bells or horns.

