



Digital Timer System

Monitor elapsed or remaining time during processes or events.

TimeTrax Sync™ Digital Timer Control Switch is used in conjunction with a *TimeTrax Sync™ Digital Timer* (sold separately) to monitor elapsed or remaining time during critical events, educational testing/instruction, seminars, manufacturing processes, lab testing, recreational activities, transportation depot applications, broadcasting and other time-sensitive events. Features include a Start/Pause button to start or stop counting function, buzzer, and hour and minute reset buttons. Count up from 00:00:00 to 99:59:00 or countdown from desired starting time. Countdown to -99:59:00. Timer displays negative symbol for first ten hours and flashes when counting negative. Constructed of stainless steel. Includes RJ45 connection cable and mounting screws.

Digital Timer Clock System Ordering Information

TIMETRAX SYNC™ DIGITAL TIMER CLOCK SYSTEM	
Part No.	Description
CTPLATEBUZ	Digital Timer Controller, Count Up/Countdown
9D26BRCT	LED Digital Timer, Red, 2.5" numeral, 6-digit, black, 105-240V AC
S9D2R6CALC	LED Digital Timer, Red, 2.5" numeral, 6-digit, silver, 105-240V AC
S9D2B6CALB	LED Digital Timer, Blue, 2.5" numeral, 6-digit, black, 105-240V AC
S9D4R6CALB	LED Digital Timer, Red, 4" numeral, 6-digit, black, 105-240V AC

- Count up (elapsed time) or countdown (time remaining)
- Use in conjunction with TimeTrax Sync™ Digital Timer (sold separately)
- Ideal for educational testing, seminars, manufacturing processes, lab testing, recreation, transportation and broadcasting applications
- Start/Pause button commences or pauses timing session
- Hour, minute and second display format (00:00:00)
- Counts up from 00:00:00 to 99:59:00, or counts down from a preprogrammed time
- Timer displays negative symbol and flashes when counting down past zero
- Connects to digital timer with one RF45 cable (included)
- Standard 2.75"W x 4.5"H switch plate
- Stainless Steel
- 1-Year Manufacturer's limited warranty
- Made in USA



Digital Timers sold separately





Digital Timer System


CONTROLLER SPECIFICATIONS

Part Number	CTPLATEBUZ
Count Up	00:00:00 to 99:59:00
Countdown	Programmable start time from maximum of 99:59:00
Mounting	Standard single gang electrical box
Power Input	Digital Timer Connection Cable (BCD)
Functions	Run, Pause, Reset, Buzzer
Finish	Stainless Steel
Warranty	1-Year manufacturer's limited warranty
Guarantee	30-Day money back guarantee
Includes	Digital Timer Control Switch Plate, mounting screws, 20' RJ45 Cable, Instructions
Dimensions	2.75"W (6.98cm) x 4.5"H (11.43cm) x 1.75"D (3.175cm)
Weight	.15lbs (.06kg)
Shipping Weight	.90lbs (.40kg)

ACCESSORIES

9T1WI*	Ethernet RF Wireless Transmitter, shelf unit (includes software)
S9DWXSLAUB*	Ethernet RF Wireless Transmitter, wall unit (includes software)


*Either part number required for optional time synchronization.

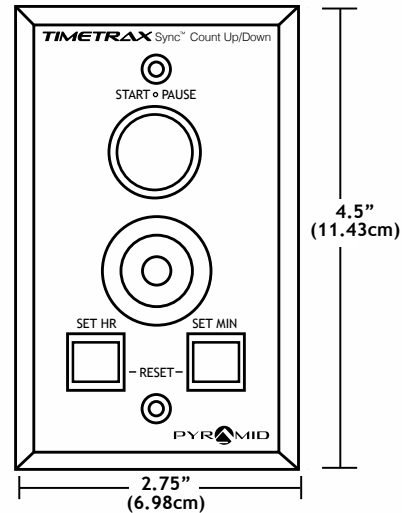


Count up/down switch plate

DIGITAL TIMER SPECIFICATIONS (sold separately)

Modes	Count Up, Countdown, Synchronized Time (optional)	
Network Connectivity	902-928 MHz frequency-hopping technology (optional)	
Power Input	105-240V AC 50/60Hz 12" leads	
Average Current Consumption	20mA/10mA	
Operating Temp	0°F (-17.77°C) to 130°F (54.44°C)	
Includes	LED Digital Timer, security wall bracket, mounting template, user guide	
DISPLAY		
Display Format	12 or 24 hour mode	
Digit Format	7 segment, LED	
Visibility	100ft (30.5m) 2.5in digit height 250ft (76.05m) 4in digit height	
LED Color	<input type="radio"/> Red (R) <input type="radio"/> Blue (B)	
CASE		
Bezel Material	Reinforced Acrylonitrile Butadiene Styrene (ABS)	
Bezel Color	<input type="radio"/> Black (B) <input type="radio"/> Silver (S)	
Lens Material	Non-glare, shatterproof transparent polycarbonate	
Mounting	Wall, Double Face Wall or Ceiling	
Warranty	3-Year manufacturer's limited warranty	
Guarantee	30-Day money back guarantee	
Compliance	FCC part 15 section 15.247 FCC ID# WC7H9ALG1	
CHARACTER HEIGHT/DIGITS	WEIGHT	DIMENSIONS (WXHXD)
2.5"/6-digit 00:00:00	1.91lbs (0.86kg)	11.25" x 4.5" x 1.5" (28.25cm x 11.5cm x 3.75cm)
4"/6-digit 00:00:00	2.8lbs (1.27kg)	15.5" x 6.25" x 1.5" (39cm x 15.75cm x 3.75cm)
SHIPPING WEIGHT	FLYING LEAD	CORD
2.5in/6-digit	1.7lbs (.77kg)	2.05lbs (.92kg)
4in/6-digit	3.05lbs (1.38kg)	3.75lbs (1.7kg)

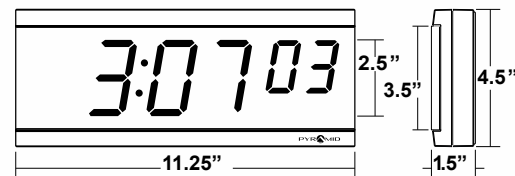

2.5" x 6 digit

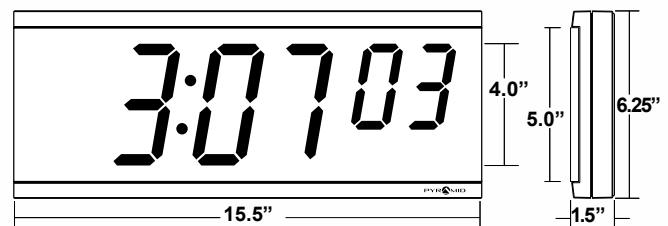

4" x 6 digit

Digital Timers sold separately

